
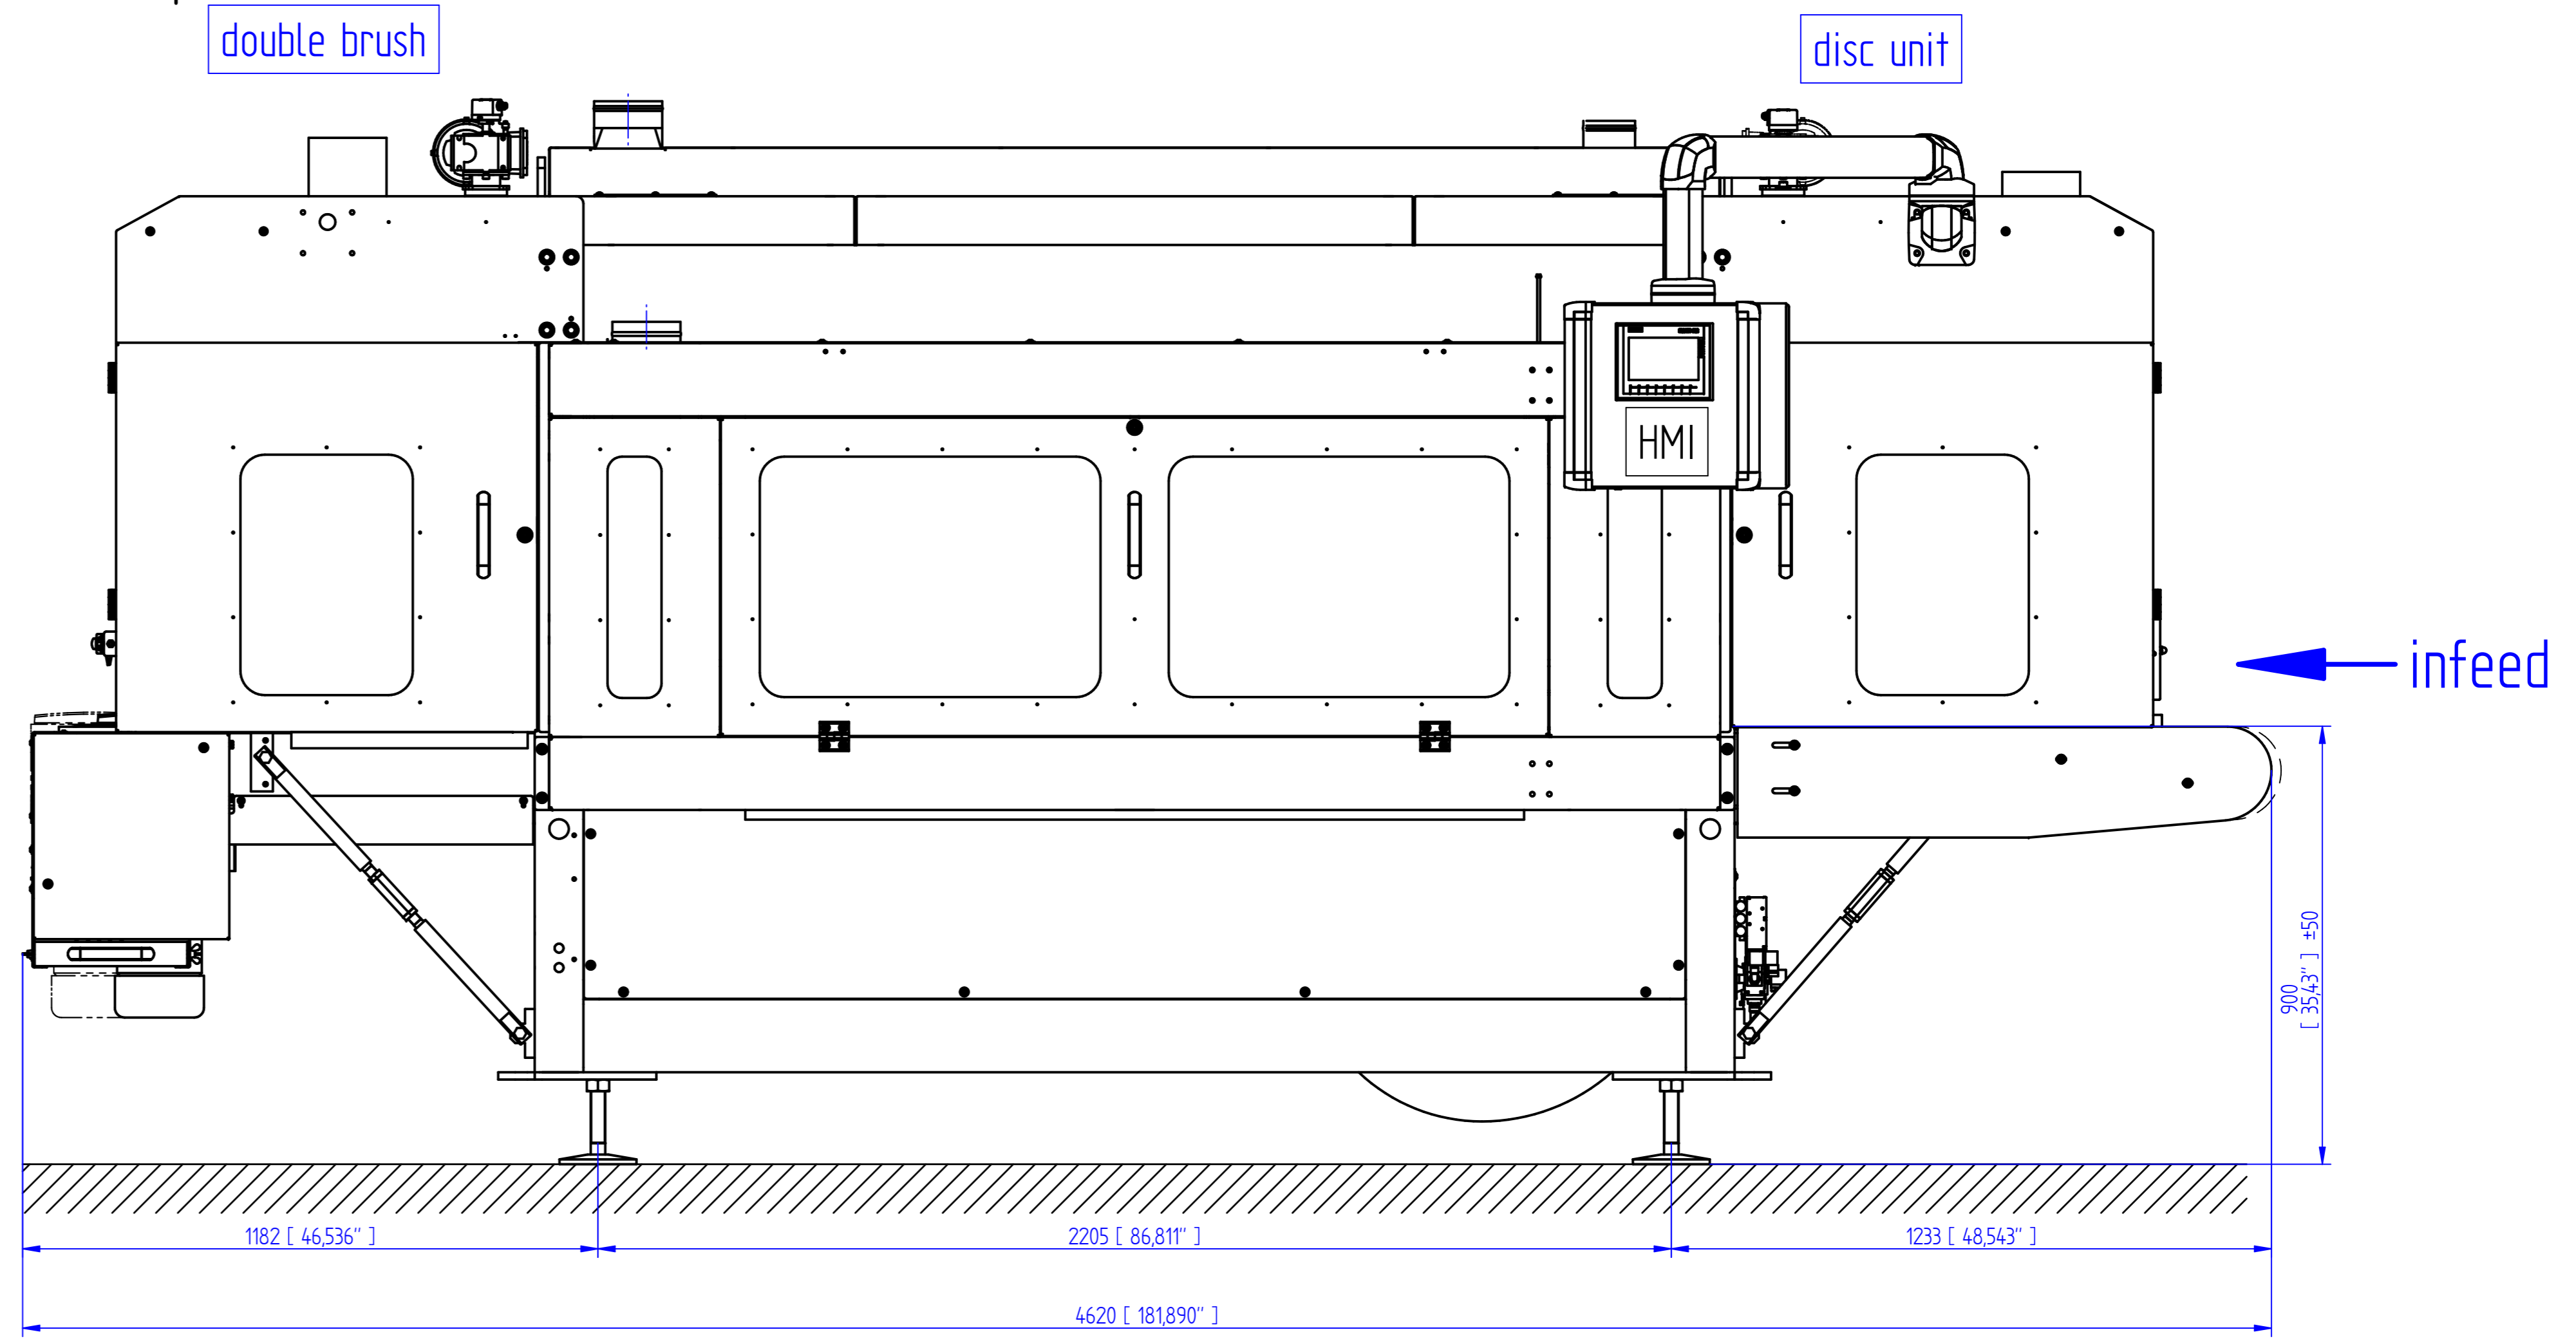


operator side

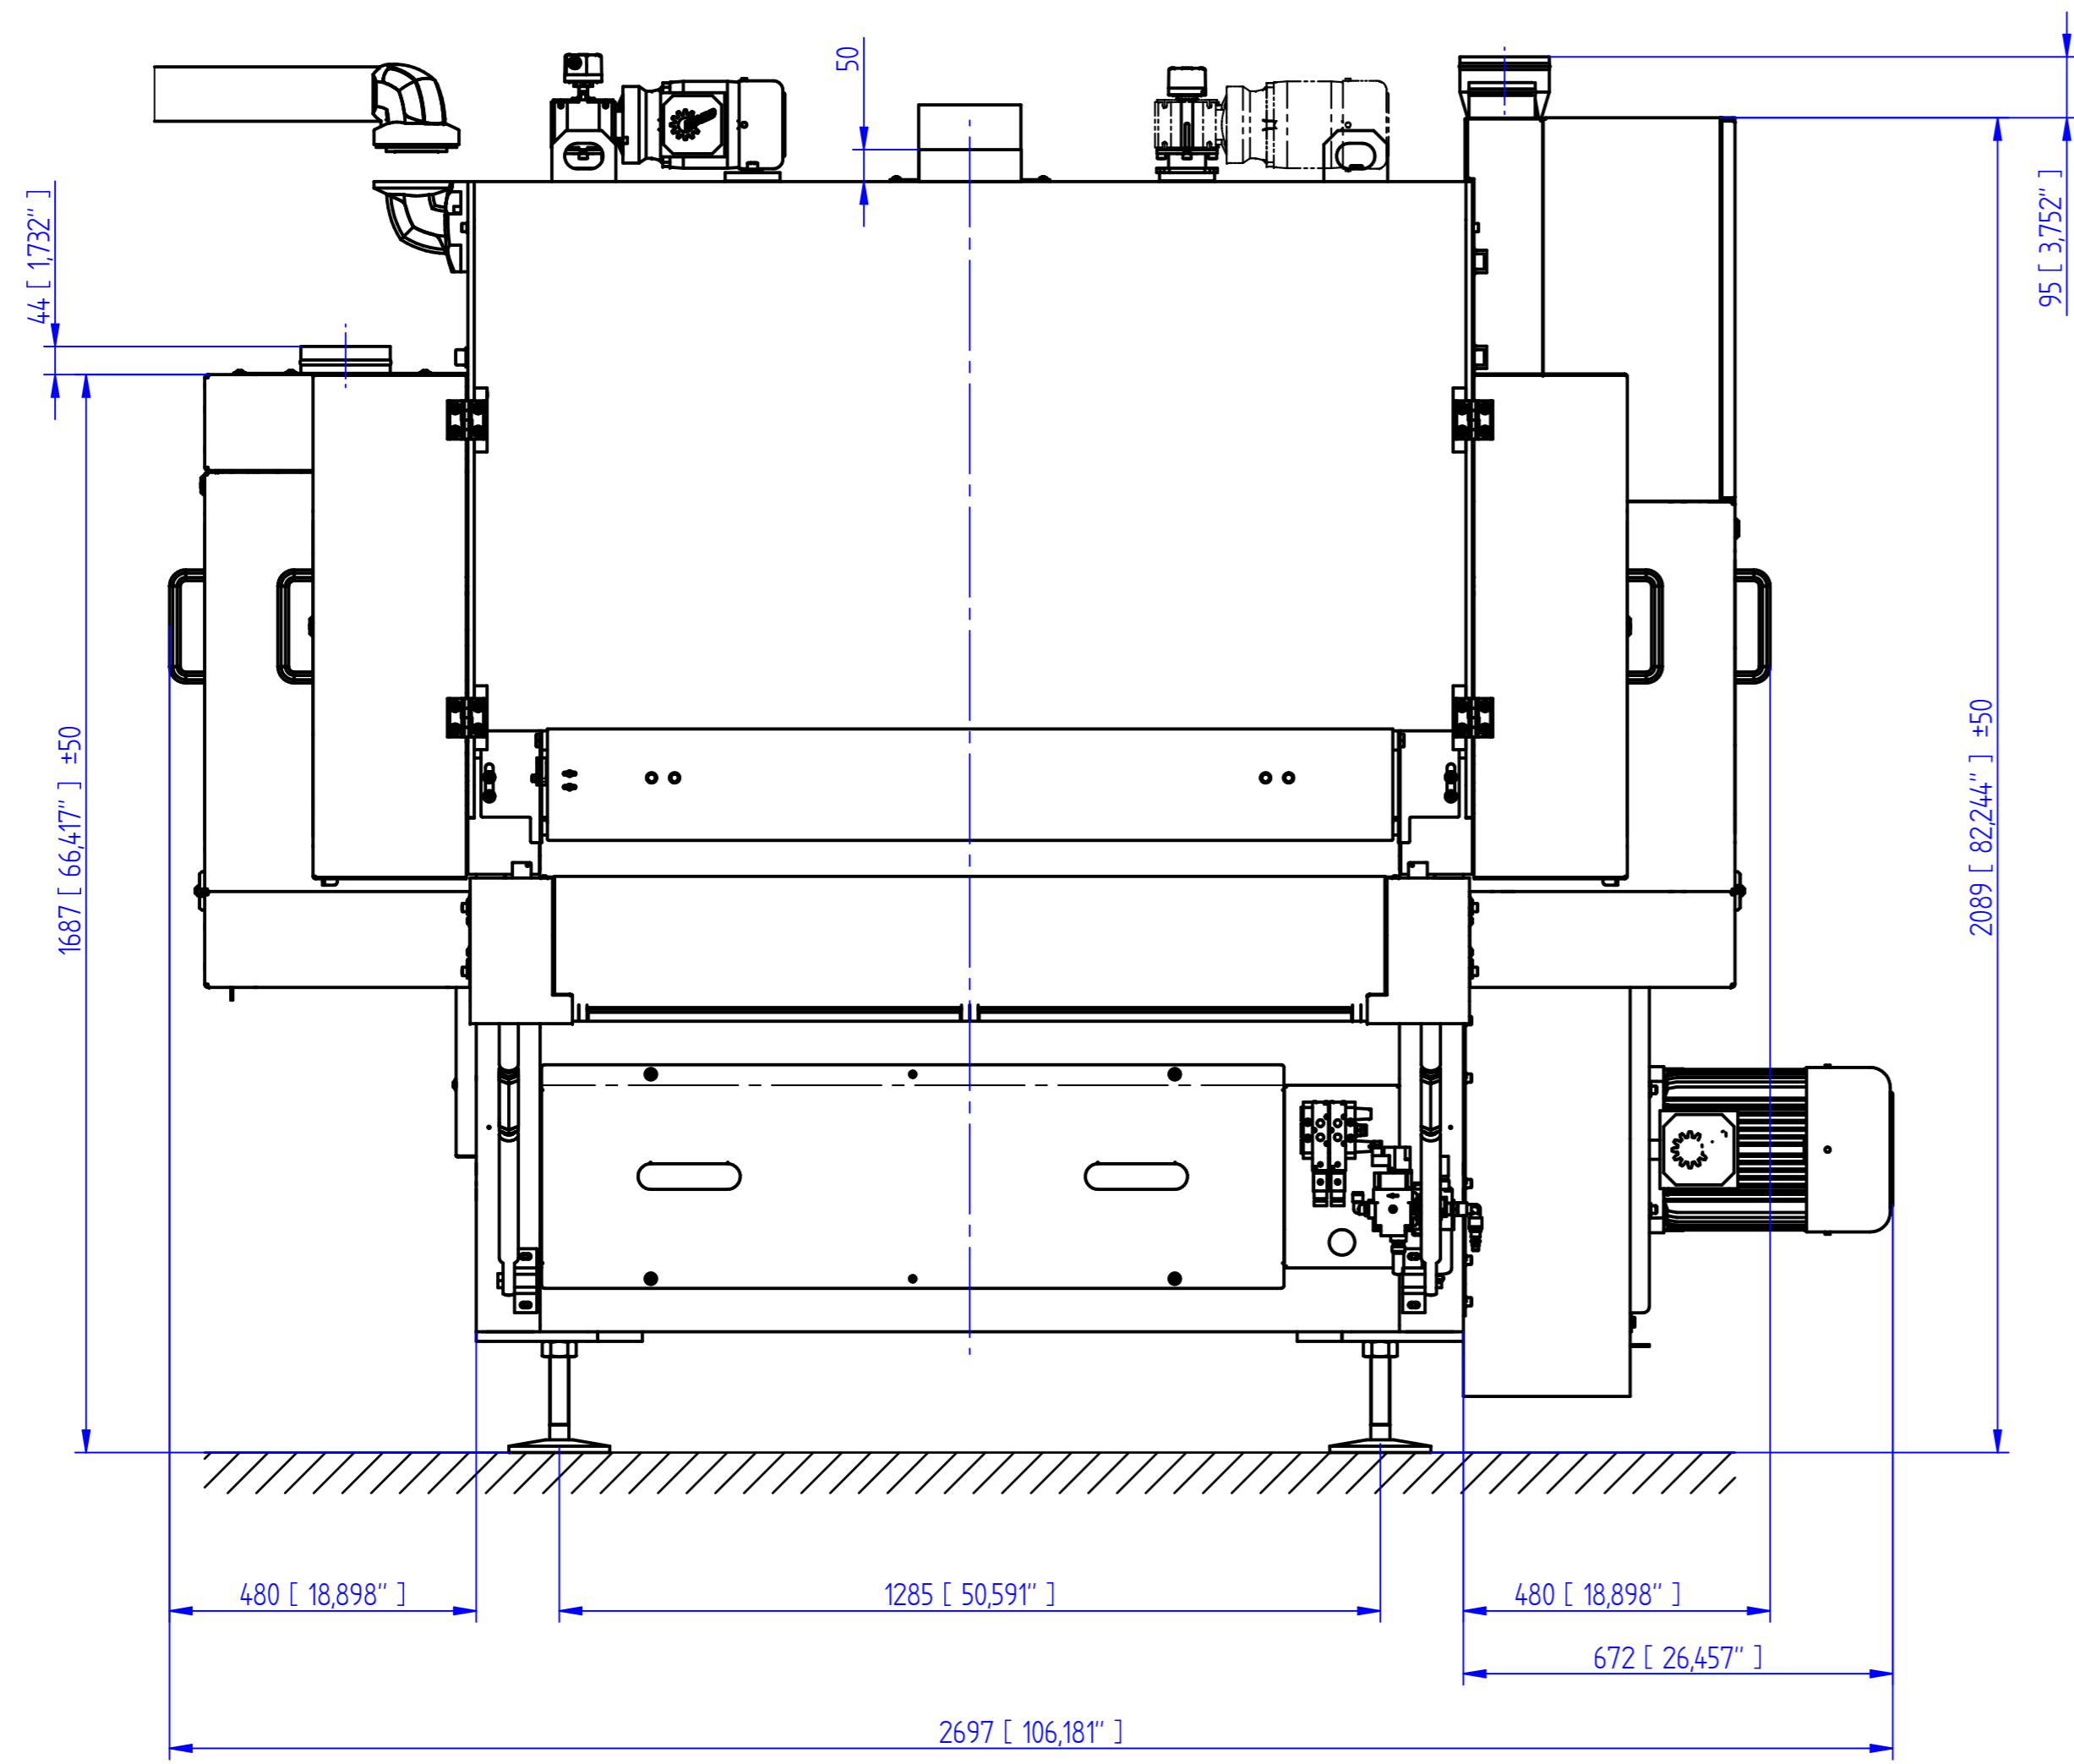


operating voltage : US4-80Y/270V AC 60Hz  
 control voltage : 24V DC  
 power consumption : 25 kW / 35HP  
 full load amps : 58A

pneumatic connection  
 max. 6 bar  
 air consumption:  
 9950NL/h (351.4cfh)

suction output  
 air velocity at extraction: 30m/s (98,43 fps)  
 static pressure: 1500 Pa

2x  $\varnothing 160\text{mm}$  => 4340 m<sup>3</sup>/h (2554 cfm)  
 2x  $\varnothing 140\text{mm}$  => 3323 m<sup>3</sup>/h (1955 cfm)  
 = 7663 m<sup>3</sup>/h (4510 cfm)

air velocity at extraction: 10m/s (98,43 fps)  
 1x  $\varnothing 100\text{mm}$  => 281,6 m<sup>3</sup>/h (165 cfm)

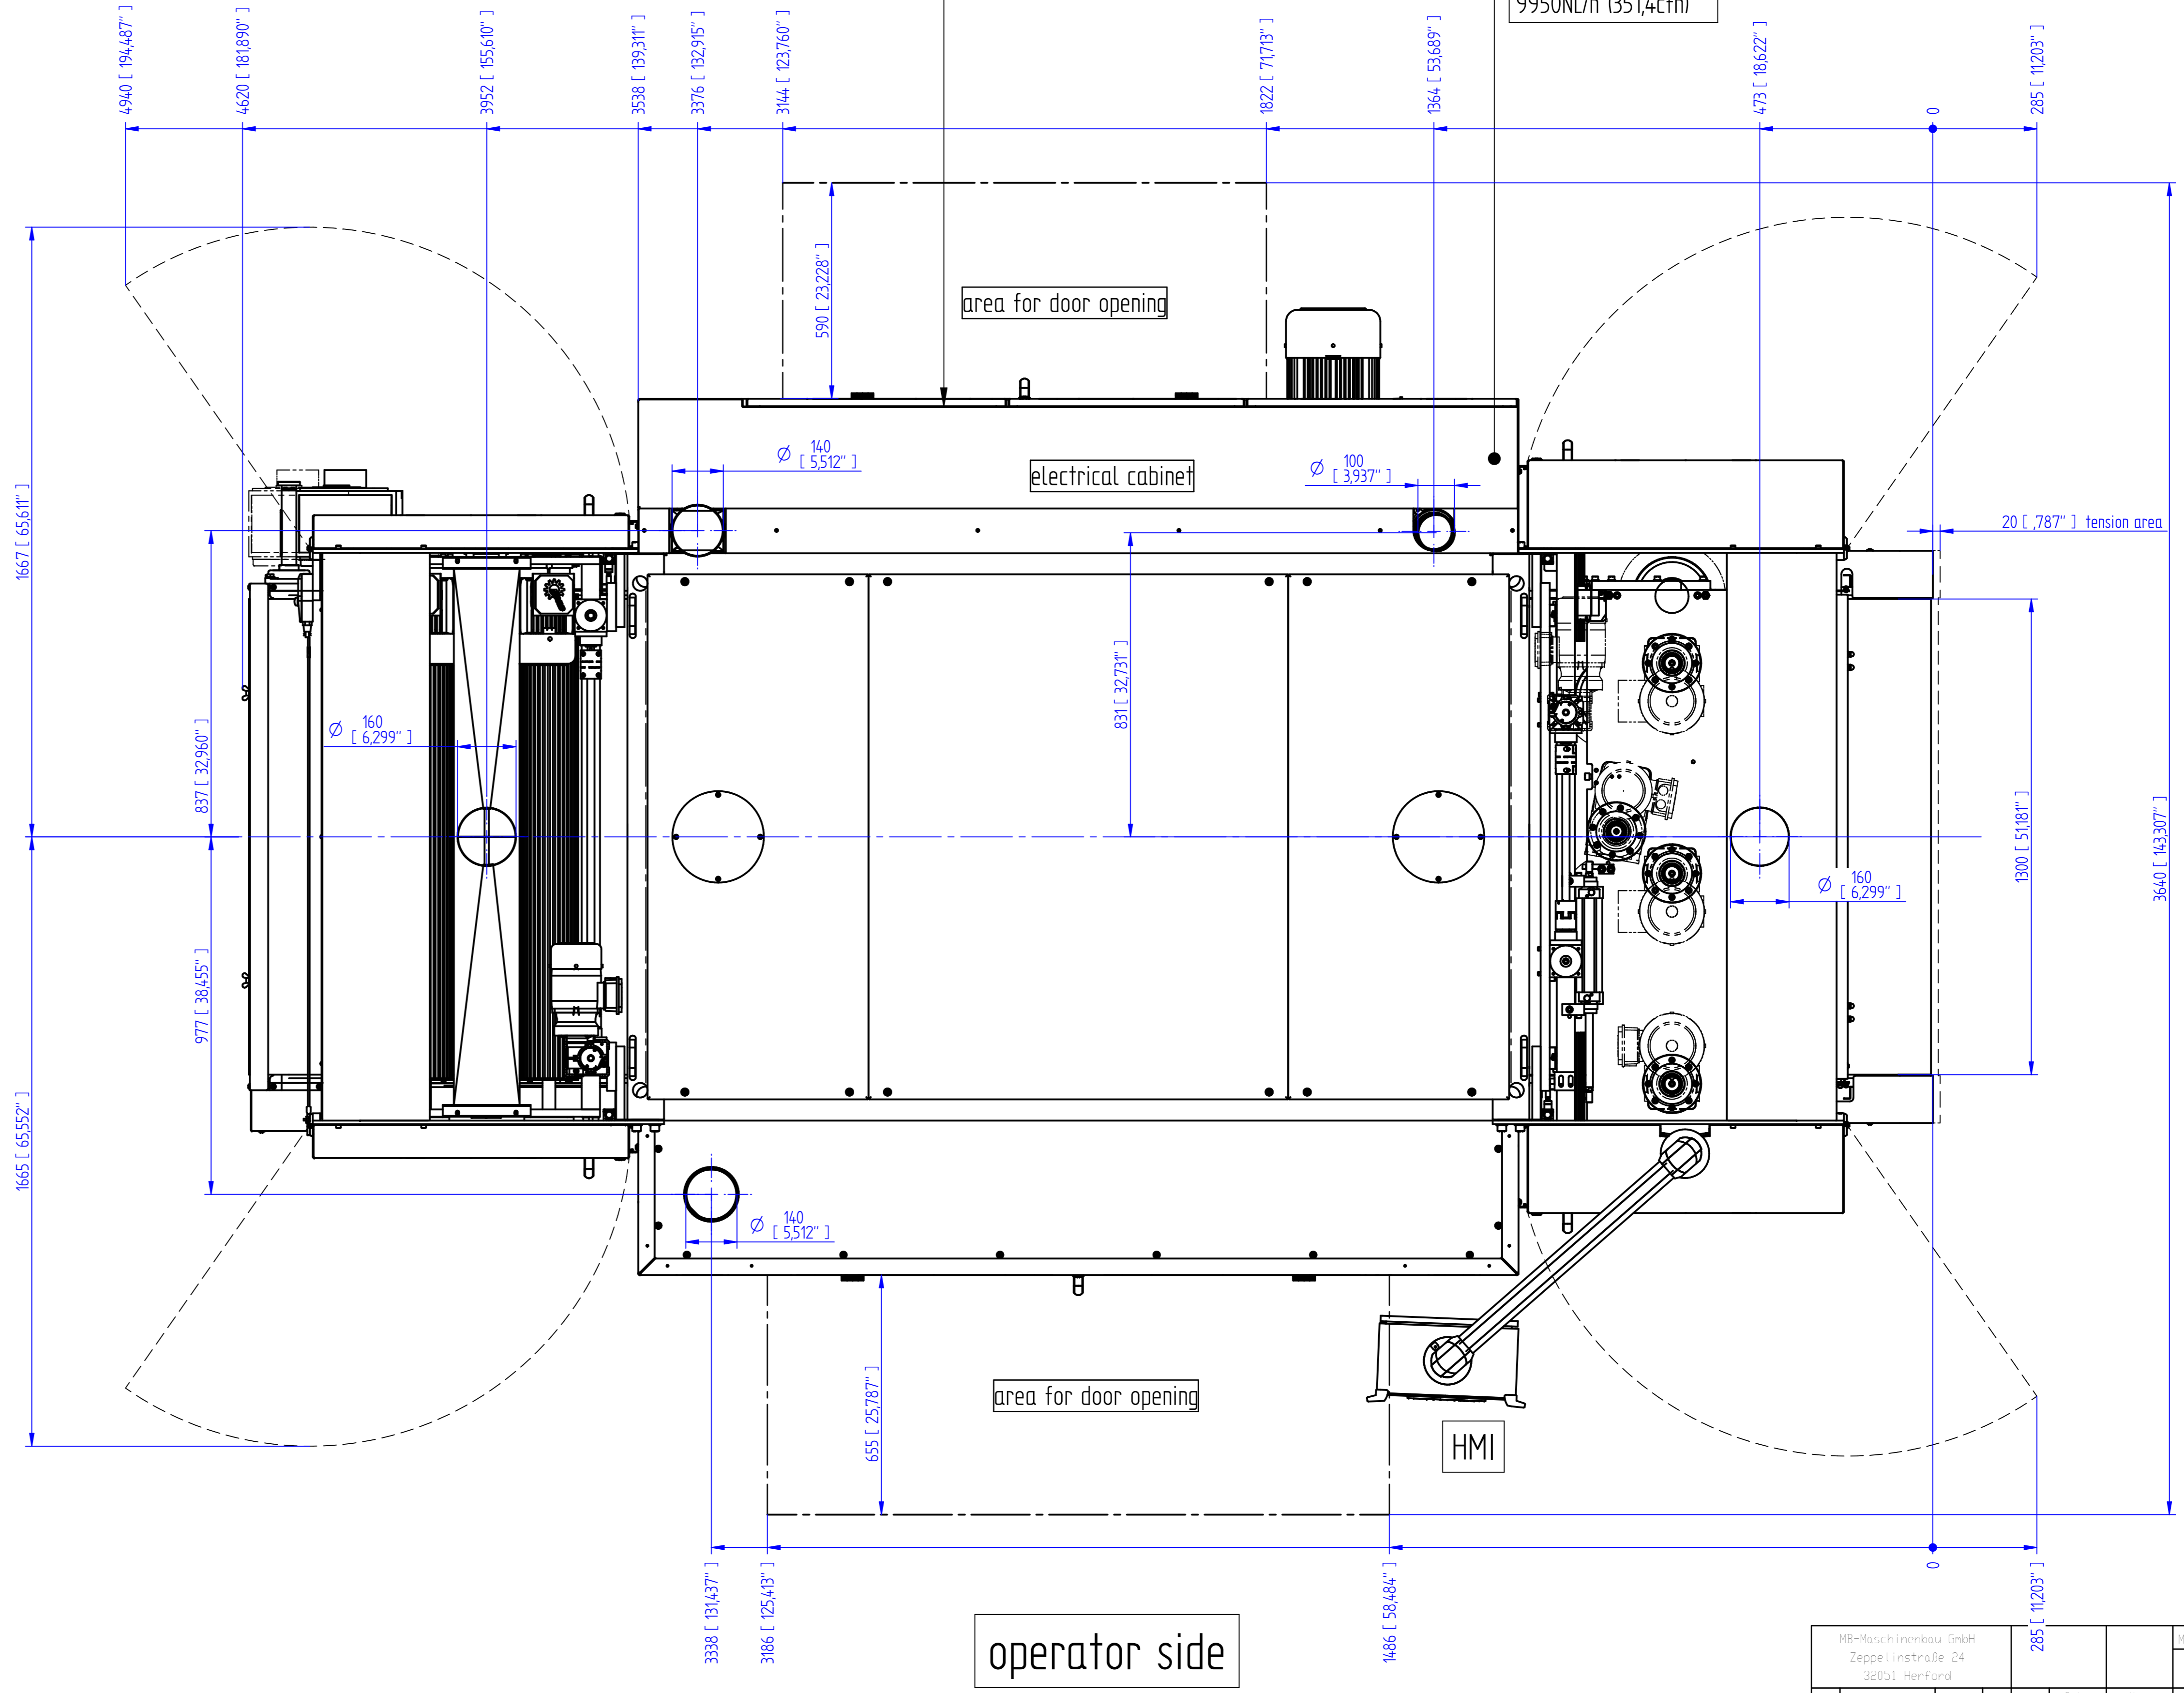

operator side

working height: 900 +/-50mm  
 35,43 +/-2"  
 weight: 4200 kg

MB-Maschinenbau GmbH Zeppelinstraße 24 52853 Heisterkamp		Skizze	Rev.	1
		RT13-DI+RT+DB		
		Floor plan 2018		
		Allgemeintoleranz DIN 132 2768mm		
		Index	1	

Für diese Zeichnung behalten wir uns alle Rechte vor.  
 Ohne unsere Zustimmung darf diese Zeichnung weder  
 reproduziert noch Dritten zugänglich gemacht werden.