

# 5025

## CUTOFF SAW



A TRADITION OF INNOVATION™



### FEATURING

- Full coverage guards
- Easily adjustable workpiece clamp height
- Easy blade access
- Automatic safety killswitch guard
- Cast iron fence and table
- Adjustable cutting cycles
- Conveniently located controls and foot pedal

**The Oliver 5025 Cutoff Saw** is the smart choice for increasing productivity in your shop. Solid construction and ingenious design are the hallmarks of Oliver Machines, and the 5025 is no exception. The heavy duty base transmits less vibration, and the cast iron precision engineered fence means your cuts are straight and cleaner. A conveniently located footpedal allowing for hands-free

operation, and an adjustable workpiece clamp means you spend less time fiddling thereby maximizing cycle time. The 5025 cuts boards up to 4x9" or 12x2" at a rate of up to 60 cycles per minute, and the full coverage guards ensure against accidents. Turn the page to read more about the Cutoff Saw and why it makes sense to have this Oliver in your shop...

**CALL: 1-800-559-5065**  
To find a dealer near you!

**2YEAR**  
LIMITED  
WARRANTY




# 5025

## CUTOFF SAW




Shown with optional roller tables

### Cutting Capacity

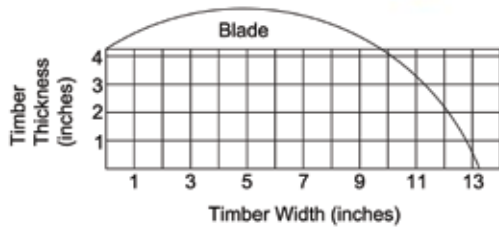

|   |  |
|---|--|
| Model No. (Left)                                    | 5025   |
| Stock No. (Left, 7-1/2HP, 1Ph)                      | 5025.001   |
| Stock No. (Left, 7-1/2HP, 3Ph)                      | 5025.002   |
| Arbor Speed (RPM)                                   | 3450   |
| Arbor Size (in.)                                    | 1  |
| Blade Size (in.)                                    | 18   |
| Cutting Capacity at Maximum Height (in.)            | 4-1/4 x 9-3/4  |
| Cutting Capacity Width (in.)                        | 1 x 13-3/8   |
| Table Size (in.)                                    | 26-1/4 x 27-1/2  |
| Table Height (in.)                                  | 32-3/4   |
| Air Supply Required (CFM/PSI)                       | 15 / 70  |
| Maximum Cycles Per Minute                           | 60   |
| Dust Port (in.)                                     | 4  |
| Minimum Dust Removal (CFM)                          | 600  |
| Main Motor  | 7-1/2HP, 1Ph, 220V Only<br>7-1/2HP, 3Ph, 220/440V<br>Prewired 220V |
| Gross Weight (lbs.)                                 | 800  |
| Gross Weight (Roller Table Set Infeed/Outfeed/lbs.) | 150  |

**OPTIONAL ROLLER TABLES WITH ADJUSTABLE STOPS** make repetitive cuts quick and accurate

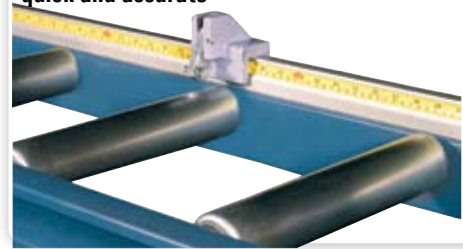

**4" DUST PORT AND PNEUMATIC FOOT PEDAL** allow for efficient dust collection and quick cycle times



**FULL COVERAGE GUARDS** help keep workers safe and productivity high.

