

**STENNER**  
USA Ltd.


Quality Engineering  
and Rugged Construction

ST-9 RESAW



# Stenner ST-9 Resaw

The ST-9 Resaw is designed to meet the requirements of the dry mill market. Its main advantages are simplicity of guarding, infinitely variable feed speed, and large capacity. The Resaw features pressure sawguides, low noise, rigid fence, single main guard, grooved pulleys, simplified saw straining, and no foundation pit.


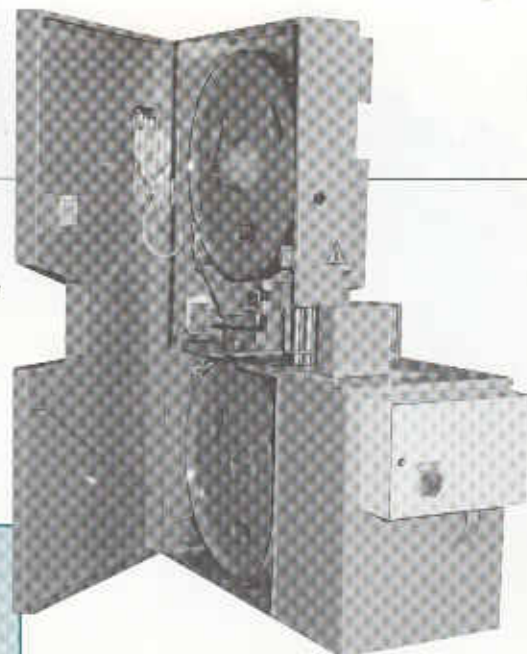


## SPECIFICATIONS

Saw Pulley Diameter	915mm	36"
Saw Length - Maximum	5.38 M	17' 8"
Saw Length - Minimum	5.28 M	17' 4"
Saw Width	100mm	4"
Maximum Opening		
Feed Roll To Saw Line	230mm	9"
Maximum Opening Fence		
To Saw Line	305mm	12"
Table Height	955mm	37.5"
Overall Machine Height	2265mm	7' 5"
Overall Machine Width	900mm	35.5"
Overall Machine Length	1500mm	4' 11"
Drive Motor Power	15 Kw	20 Hp
Feed Speed Range	7.5-30	25-100
	M/Min	Ft/Min
Maximum Depth Of Timber	370mm	14.5"
Fence Tilt	0° to 35°	

## Optional Extras

- D.C. braking
- Quick action fence
- Infeed & outfeed table rollers
- Interlocked guards
- Rubber covered feed roller
- Arris rail feed roller
- Coarse pitch feed roller
- Linear timber measuring unit
- Timber support rollers

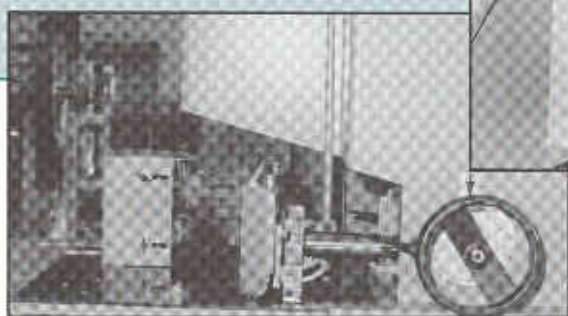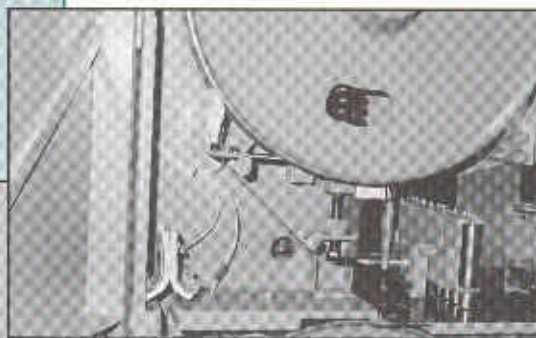

Imported by

**STENNER**  
USA Ltd.

284 Maple Street, Hopkinton, NH 03229  
603-746-4793 FAX 603-746-4819

Distributed By:

Stenner has a company policy of continuous improvement and development, therefore specifications are subject to change without notice. The company accepts no responsibility for discrepancies in specifications or illustration contained in its publications.