

JLT CLAMPS

GLUE APPLICATOR

JLT DOOR STILE SPREADER
MODEL #160B

SPECIFICATIONS:


- Simple mechanical operation
- Many times faster than manual glue application from a bottle
- All welded steel construction
- Minimize potential for squeeze out
- Virtually no clean up (at end of the day mist with water and cover)
- Ships pre-assembled

MESUREMENTS:

Width: 16"

Height: 38"

Depth: 16"

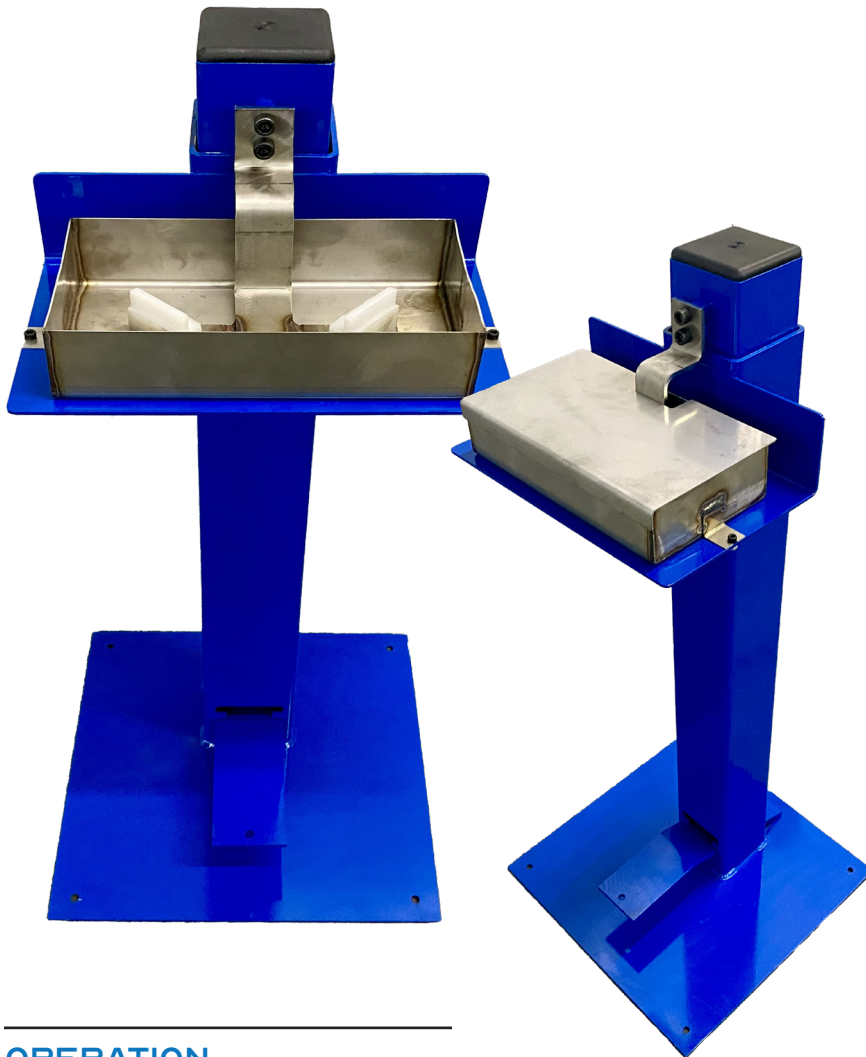

OPERATION

Simply step down on the foot treadle and the grid is raised up and out of the glue. The operator then touches the door stile to the glue saturated profiles applying a precise amount to the female joint. The operator slowly removes pressure from the treadle and the grid drops back into the pan.



The stainless steel pan has a 1-gallon capacity and the included pair of generic UHMW profiles are attached to a stainless steel mounting bracket.



The spray bottle and stainless steel lid allow for easy overnight storage. There is an extra block of UHMW included for the making of custom profiles.



The UHMW profiles rise above the edges of the glue pan for easy application of glue to the door stiles.



JAMES L. TAYLOR

JAMES L. TAYLOR MANUFACTURING

130 Salt Point Turnpike | Poughkeepsie, NY 12603 | 845-452-3780 | sales@jamestaylor.com
jltclamps.com | jamestaylor.com