



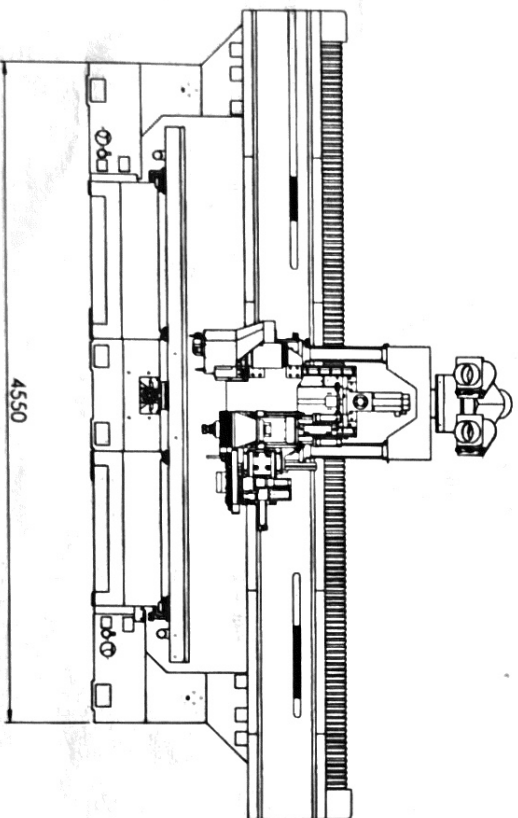

MODEL	EXACT PLUS
STROKE	X AXIS 4400 mm Y AXIS 1775 mm Z AXIS 350 mm
TABLE SIZE	X,Y AXIS 3700x1600 mm Z AXIS 800/1600 mm
MAX. FEED SPEED	20 M/min
ATC ROUTER NO.1 (PRAM AXIS)	NUMBER OF SPINDLE 1 SPEED 21000RPM SPINDLE NOSE HSK63P
NO.2 MULT-DRILL	NUMBER OF TOOLS 10 DRILL ROTATION SPEED 6000RPM SHANK OF DRILL ϕ 10mm GROOVING SAW MAX. O.D. ϕ 30mm GROOVING SAW MAX. THK 5mm
NO.3 MULT-DRILL	DRILL ROTATION SPEED 4200RPM SHANK OF DRILL ϕ 12mm GROOVING SAW MAX. O.D. ϕ 30mm GROOVING SAW MAX. THK 5mm
TOOL DIA	FOR ROUTER BIT (O.D) MAX. ϕ 25 mm FOR ROUTER BIT (O.D) 11KW
POWER	NO.1 ATC HEAD 1.5KW NO.2 HEAD 6 ECOCAP
AIR PRESTURE	HOSE : 3/4"
NC CONTROLLER	FANUC
DIMENSIONS	FLOOR AREA 5600x 3400 mm HEIGHT 3000mm
WEIGHT	9,000 KG
VOLUME	3,300 M ³ /HR (1,974CFM)
SUCTION CONNECTION AT CUSTOMER	1 x ϕ 200 mm

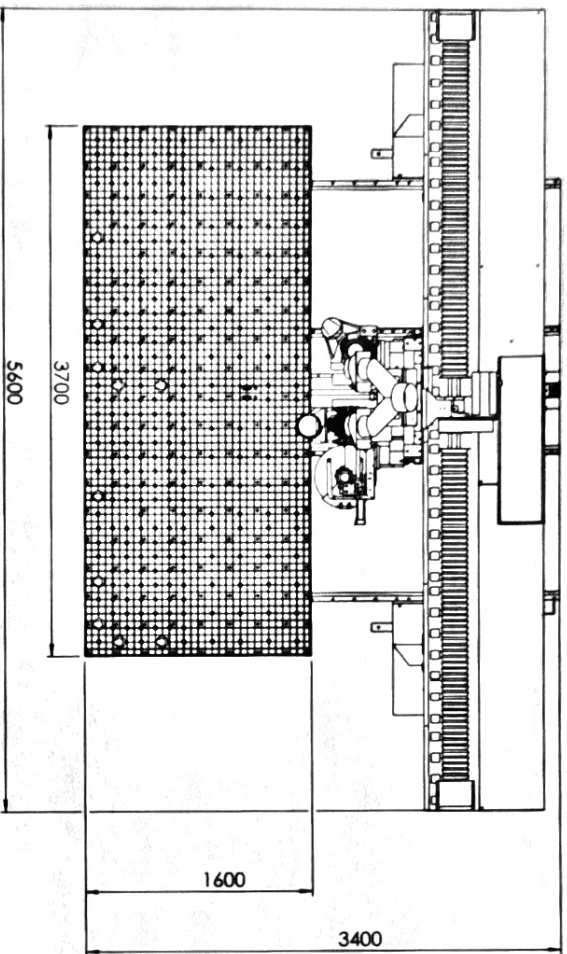